



Typical Drywall Installation


CITY OF LONG BEACH PLANNING & BUILDING DEPARTMENT
333 W. OCEAN BLVD., 4TH FLOOR, LONG BEACH, CA 90802
INFORMATION (562) 570-6651 FAX (562) 570-6753

APPLICATION OF SINGLE LAYER GYPSUM BOARD

In general apply gypsum board to ceilings first, then to walls. To minimize end joints, use panels of maximum practical lengths. Gypsum board at openings shall be located so that no joint will align with edges of opening unless control joints will be installed at these locations. Stagger end joints in successive courses with joints on opposite sides of a partition placed on different studs. All cut edges and ends of the gypsum board shall be smoothed to make a neat joining.

FASTENERS

The size and spacing of fasteners shall conform to the table below. Space the fasteners when used at edges of boards not more than one inch from the edges and not less than 3/8 inch from the edges and ends of gypsum board. Fasteners should be driven so that the heads are slightly below the plane of the face paper. Avoid fracturing the face paper or damaging the core. Hold the panel in firm contact with the framing while driving the fasteners. Install fasteners in the field on the board, first working towards ends and edges.

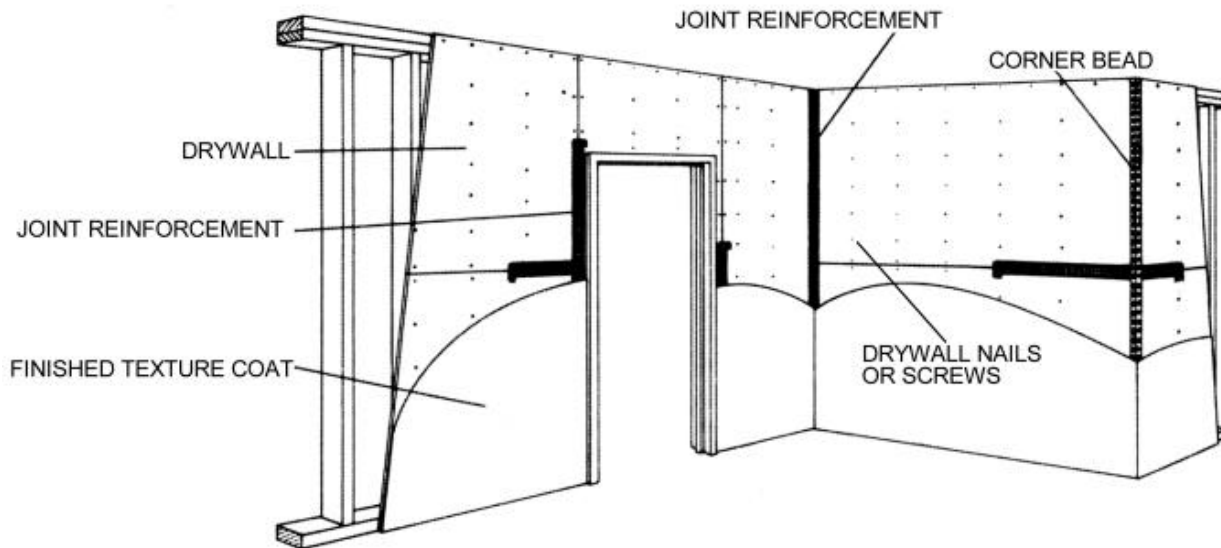

THICKNESS OF DRYWALL	PLANE OF FRAMING SURFACE	SPACING OF MEMBERS	SPACING OF NAILS	SPACING OF SCREWS	FASTENERS
NOTE: Wallboard may be applied parallel or perpendicular to the direction of the framing members except for wallboard applied over studs spaced 24" o.c. which shall be applied perpendicular to framing members only.					
1/2"	HORIZONTAL	16"	7"	12"	Nails: No. 13 gage, 1-3/8" long, 19/64" head 0.098" diameter, 1-1/4" long, annular ringed 5d cooler 0.086" dia., 1-5/8" long, 15/64" head Wallboard 0.086" dia., 1-5/8" long 9/32" head Screws shall be long enough to penetrate into wood framing not less than 5/8".
		24"			
	VERTICAL	16"	8"	16"	
		24"		12"	
5/8"	HORIZONTAL	16"	7"	12"	Nails: No. 13 gage, 1-5/8" long, 19/64" head 0.098" diameter, 1-3/8", annular ringed 6d cooler 0.092" dia., 1-7/8" long, 1/4" head Wallboard 0.0915" dia., 1-7/8" long, 19/64" head Screws shall be long enough to penetrate into wood framing not less than 5/8".
		24"			
	VERTICAL	16"	8"	16"	
		24"		12"	